


## BV1-6666T-LD-BSP

Ball valve with 1-pce body, reduced bore, BSP threaded F/F ISO228/1-G, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
016177T1008-A	BV1-6666T-LD-BSP - 1/4" - LEVER
016177T1010-A	BV1-6666T-LD-BSP - 3/8" - LEVER
016177T1015-A	BV1-6666T-LD-BSP - 1/2" - LEVER
016177T1020-A	BV1-6666T-LD-BSP - 3/4" - LEVER
016177T1025-A	BV1-6666T-LD-BSP - 1" - LEVER
016177T1032-A	BV1-6666T-LD-BSP - 1 1/4" - LEVER
016177T1040-A	BV1-6666T-LD-BSP - 1 1/2" - LEVER
016177T1050-A	BV1-6666T-LD-BSP - 2" - LEVER

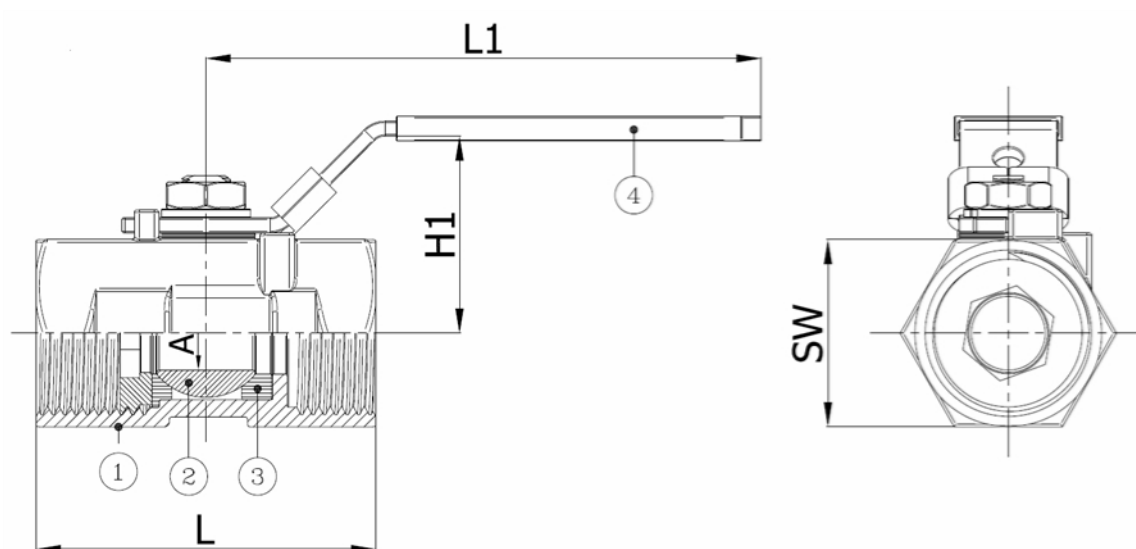

DN/Size	A	H1	L	L1	SW	Press.Cl.	Weight(kg)
DN08 (1/4")	5	22,1	38,7	64,4	17,1	1000 WOG	0.06
DN10 (3/8")	7	23,6	44,2	76,5	20,7	1000 WOG	0.10
DN15 (1/2")	9	30,4	55,6	93,5	24,8	1000 WOG	0.16
DN20 (3/4")	12,5	33,7	62,1	93,5	31,4	1000 WOG	0.25
DN25 (1")	15	40,1	68,9	111,3	38,2	1000 WOG	0.41
DN32 (1 1/4")	20	44,5	78,2	111,3	47	1000 WOG	0.61
DN40 (1 1/2")	24,5	50,5	86	139	53	1000 WOG	0.86
DN50 (2")	32	56,6	102,7	139	65,2	1000 WOG	1.38

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)


## BV1-6666T-LD-NPT

Ball valve with 1-pce body, reduced bore, NPT threaded F/F ANSI B1.20.1, with lockable lever

Face to Face Standard: Factory standard



Item Number	Belven Ref
016377T1008-A	BV1-6666T-LD-NPT - 1/4" - LEVER
016377T1010-A	BV1-6666T-LD-NPT - 3/8" - LEVER
016377T1015-A	BV1-6666T-LD-NPT - 1/2" - LEVER
016377T1020-A	BV1-6666T-LD-NPT - 3/4" - LEVER
016377T1025-A	BV1-6666T-LD-NPT - 1" - LEVER
016377T1032-A	BV1-6666T-LD-NPT - 1 1/4" - LEVER
016377T1040-A	BV1-6666T-LD-NPT - 1 1/2" - LEVER
016377T1050-A	BV1-6666T-LD-NPT - 2" - LEVER

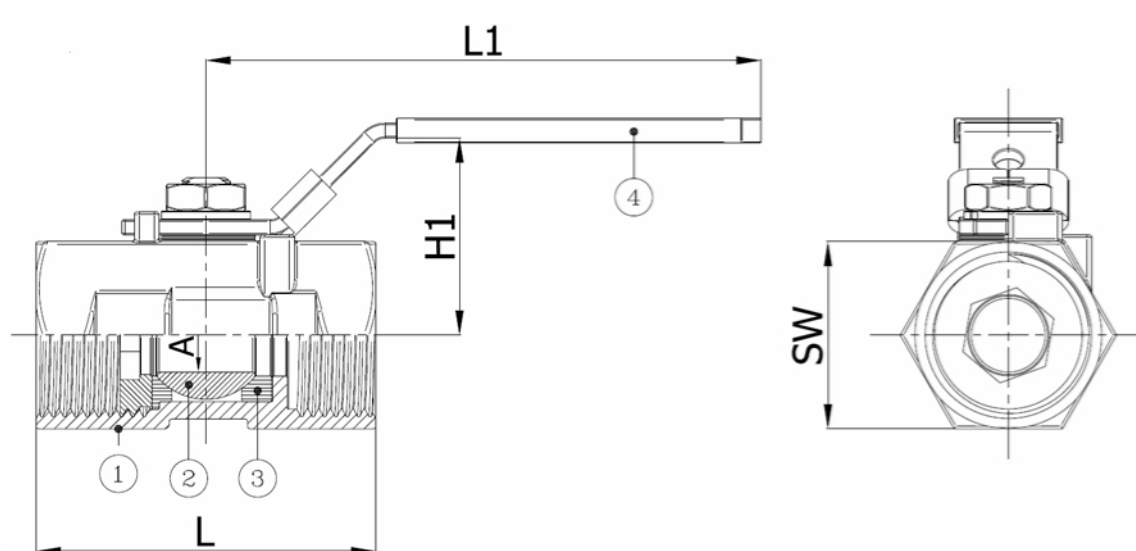

DN/Size	A	H1	L	L1	SW	Press.Cl.	Weight(kg)
DN08 (1/4")	5	22,1	38,7	64,4	17,1	1000 WOG	0.06
DN10 (3/8")	7	23,6	44,2	76,5	20,7	1000 WOG	0.10
DN15 (1/2")	9	30,4	55,6	93,5	24,8	1000 WOG	0.16
DN20 (3/4")	12,5	33,7	62,1	93,5	31,4	1000 WOG	0.25
DN25 (1")	15	40,1	68,9	111,3	38,2	1000 WOG	0.41
DN32 (1 1/4")	20	44,5	78,2	111,3	47	1000 WOG	0.61
DN40 (1 1/2")	24,5	50,5	86	139	53	1000 WOG	0.86
DN50 (2")	32	56,6	102,7	139	65,2	1000 WOG	1.38

Item 1	Item 2	Item 3	Item 4
Body Material	Ball Material	Seat Material	Actuator Material
Stainless steel : A351 CF8M	Stainless steel : A351 CF8M/A182-F316	PTFE	Stainless steel : AISI 201 (EN1.4372)